



improve your life

COMFORTSEAL 400 - COMFORT SEAL 600



MODEL SELECTION measure the total length of the window or French window frame.

COMFORTSEAL 400 - for windows with max perimeter 400 cm.

COMFORTSEAL 600 - for windows with max perimeter 600 cm.



FRENCH WINDOWS

internal or external push

It is recommended to seal all four sides around the window. The sealing fabric must be precisely fitted to the dimensions of the window.

1. Attach the provided adhesive Velcro to both the frame and the inside of the window frame.
2. After attaching the Velcro, apply and adapt the fabric, starting from the centre of the window frame (RED DOT) as indicated in the installation drawings.

A+B+C+D→ Fixing the adhesive Velcro

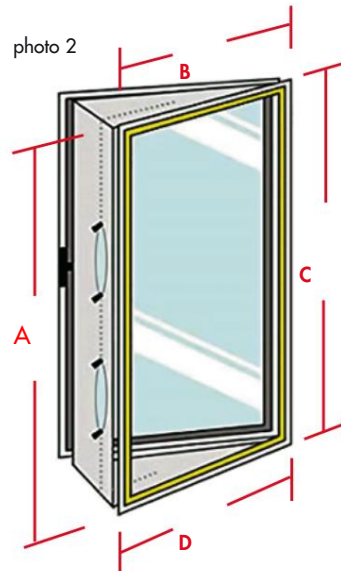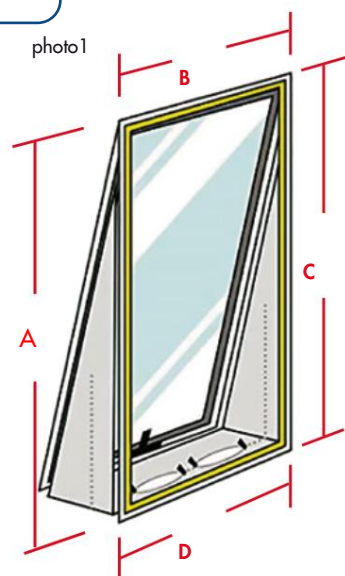



TILT-DOWN WINDOWS

It is recommended to seal all three sides around the window.

The sealant fabric must be fitted precisely to the dimensions of the window.

1. Attach the provided adhesive Velcro to both the frame and the inside of the window frame.
2. After applying the Velcro, apply and adjust the sealing fabric. After applying the Velcro, apply and adjust the fabric, starting from the center of the window frame (RED DOT) as shown in the installation drawings.

A+B+C→ Fixing the adhesive Velcro

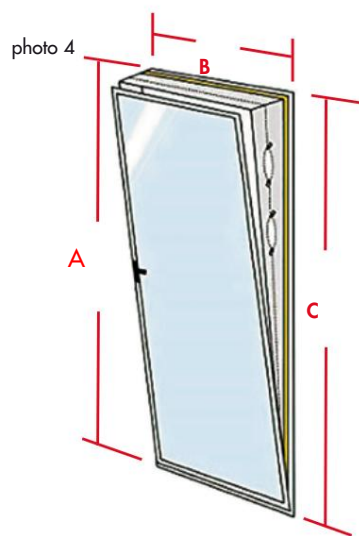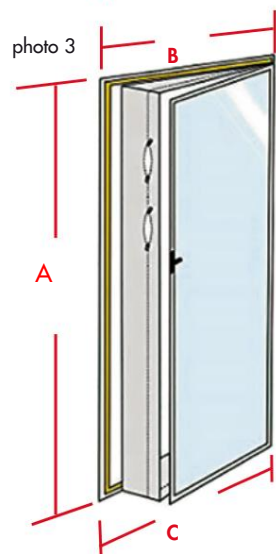


INSTALLATION IN FEW SIMPLE STEPS

For correct installation of the window and French window accessory, follow the instructions below



VELCRO APPLICATION

Apply a strip of adhesive Velcro supplied to the sides of the frame and to the internal edge of the sash.



IDENTIFYING THE SEAL SIDES

The curved (BLUE lines) side, the widest, must be attached to the window frame. The straight (GREEN lines) side, the narrowest, must be attached to the window sash.



INSTALLING THE WINDOW SEAL

Start by applying the window seal from the center of narrow GREEN side on the window handle RED DOT. Attach the wide BLUE side to the window frame and attach the narrow GREEN side of the window.



HOSE POSITIONING

Open the window slightly, insert the air hose between the hinges and close the zip. To close the window, remove the hose and push the sash back together.