

AKAI


USER MANUAL

ACR-2993

EN - ENGLISH

DUAL ALARM CLOCK WITH BLUETOOTH

Location of control

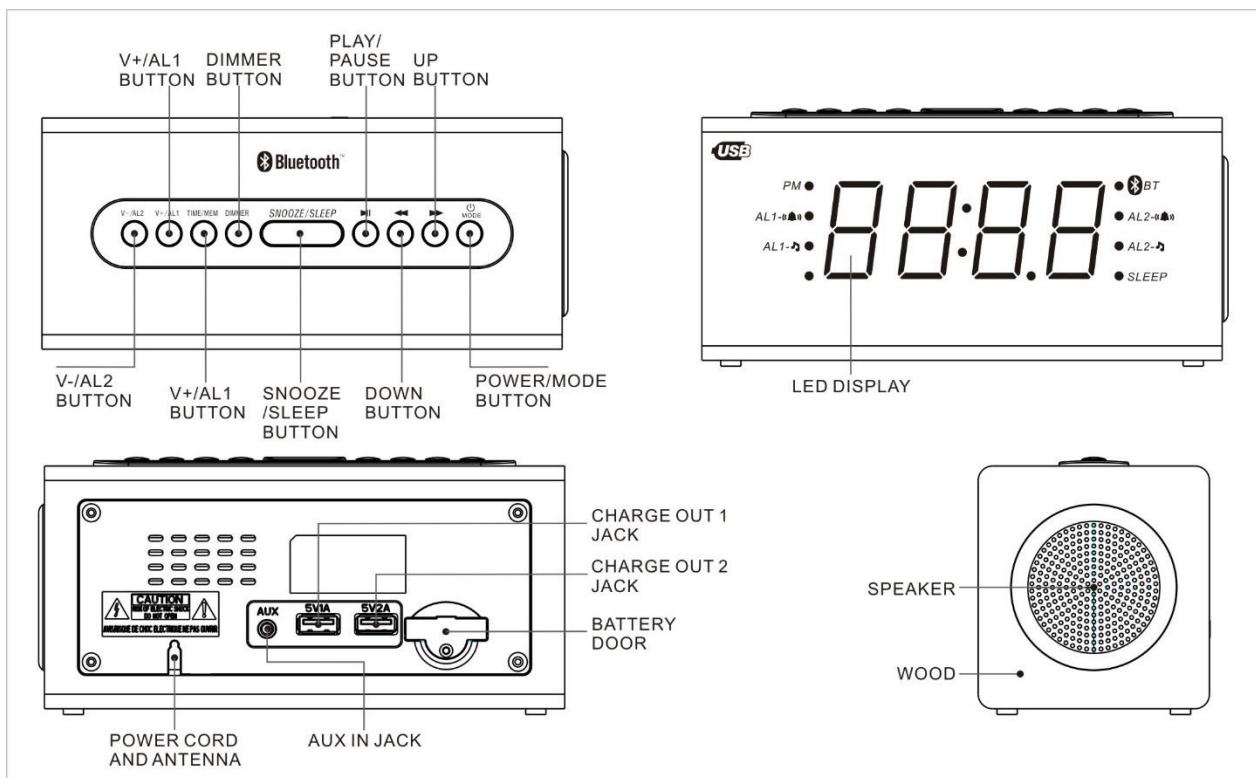

Instruction manual:

1. FM Radio:

Under Time mode, short press “POWER/MODE” button to turn on the FM radio, and FM “87.5” display, “VOL+/AL1” button for volume increase, “VOL-/AL2” button for volume decrease, “DOWN” button for downward the station, “UP” button for upward the station. Long press “UP” or “DOWN” button to search upward/downward station repeatedly.

2. AUX IN operation:

Under Time mode, short press “POWER/MOD” button three times to get into AUX mode, “AUX” will display. Input external audio signal from AUX IN JACK, VOL-/AL1 button for volume decrease, VOL+/AL2 button for volume increase. Long press “POWER/MODE” to turn off the clock radio.

3. Bluetooth:

Under Time mode, short press “POWER/MODE” button two times to get into Bluetooth mode, “BT” will display, BT indicator flashing means Bluetooth is pairing. After pairing OK, the speaker will issue a note, and the BT indicator will light. Short press “PLAY/PAUSE” button to play or stop the Bluetooth music, short press “UP” or “DOWN”

button to upward or downward the music. Long press "UP" or "DOWN" button to upward or downward the music rapidly.

Under FM/AUX IN/BLUETOOTH mode, Long press "POWER/MODE" button to turn off and back to TIME mode.

4. Time Setting:

Under TIME mode, long press TIME/MEM button, the Hour indicator will flash, then short press "UP"/ "DOWN" button to adjust the Hour. Short press TIME/MEM button to confirm, then the Min will flash. Short press "UP" or "DOWN" button to adjust the Min, short press "TIME/MEM" button to confirm. The time setting is finished. Or the time setting will be complete in 5 seconds with no continue operations.

5. AL1 Setting:

(1) Under TIME mode, long press VOL+/AL1 button, the LED display indicator will flash. Short press "UP" or "DOWN" button to adjust the Hour, short press "VOL+/AL1" button to confirm. Then the Min of the LED display will flash, short press "UP" or "DOWN" button to adjust the Min, short press "VOL+/AL1" button to confirm. Then the HOUR and MIN will flash at the same time. Short press UP or DOWN button to choose the Alarm mode: AL1-BB/AL1 RADIO. Press Vol+/AL1 to confirm the Alarm mode. At this time the display shows the volume level "16" and flashes. Short press "UP" or "DOWN" button to choose the volume level: 05-16/AL1 setting is finish.

(2) When alarming, short press POWER/MODE button. AL1 will be off and on again automatically in 24hour.

(3) To turn off AL1 (AL OFF), long press "VOL+/AL1" button, the Hour will flash then short press "VOL+/AL1" button two times, Hour and Min will flash at the same time, short press "UP" or "DOWN" button to turn off AL1.

6. AL 2 Setting:

"AL2" settings are the same as "AL1".

7. SNOOZE Setting:

When it is alarming, short press SNOOZE button, and alarm will be off and on again in approximately 9 minutes. Or short press POWER/BAND button to stop the alarm, and the alarm will go on again at the same time in the next day.

8. SLEEP Setting:

Under Radio/Bluetooth/AUX mode, short press "SLEEP" button, display 90 min. Short press "SLEEP" again to downward the sleep time: 90-80-70-60-50-40-30-20-10-OFF; OFF means turn off the SLEEP function.

9. DIMMER Setting:

Under any mode, short press "DIMMER" button to change the LED mode: Normal light- high-light-off.

10. FM saving and take out:

1) Under radio mode, long press TIME/MEM BUTTOM, LED DISPLAY displays "P08", short press "UP" or "DOWN" button to select the storage number. Short press "TIME/MEM" button to complete.

2) After save the station, short press "TIME/MEM" button to take out the saved station.

Charging operation:

Put the power plug (POWER CORD) into the network socket, Connect the phone to the CHARGE OUT1(5V 1A) jack for mobile charging.

The CHARGE OUT2 JACK (5V2A) jack is for IPAD charging.

Note: do not charge the phone and IPAD at the same time for a long time, because the long-term work in the high power consumption will cause damage.

Back up Battery:

When the AC power goes off, the backup battery is used only to keep the clock running, and power before the working state of the save, stored radio will not be lost, at this time, only the DISPLAY LED will not show.

Performance Index:

- i. Frequency : FM : 87.5-108MHZ
 - ii. CHARGE OUT: 5V1A, 5V2A
 - iii. BLUETOOTH: 2.1
 - iv. AC Power : 100-240V/50HZ
 - v. Power : 12.5W
 - vi. Output power : 4R/1.5W
- Backup battery : 3V (use 1 PCS "CR2032"size batteries for time memory)

DISPOSAL OF ELECTRICAL AND ELECTRONIC EQUIPMENT



This symbol on the product or packaging means that the product should not be treated as household waste. Do not throw garbage at the end of its life, but take it to a collection center for recycling. in this way you will help to protect the environment and be able to prevent any negative consequences that it would have on the environment and human health.

To find your nearest collection center:

-Contact local authorities

- Access the website: www.mmediu.ro

Request additional information from the store where you purchased the product.