

AKAI

AMW-200/AMD-300 WIRELESS MICROPHONES User Manual

Features:

- Digital audio transmission technology;
- Unique digital 32 bit ID pilot technology, avoid interference even same frequency;
- Ultra-short audio latency;
- Audio sampling mode:48KHz;
- Frequency response:50Hz-18KHz;
- Ideal distance:20-30Meter (In open place)



Microphone's Specifications:

- Microphone type: Dynamic
- Polar Pattern: Cardioid
- Frequency Range: VHF 174~216MHz
- Tone Coder Type:Digital 16bit ID code pilot technology
- FR output power:10mW
- Audio Dynamic Range:96dB
- Harmonic Radiation<-50dB
- Distortion:<0.1%
- Power supply:18650 Lithium Battery 3.7V,1PCS


Receiver's specifications:

- Frequency Range:VHF174~216MHz
 - Tone Coder Type:Digital 16bit ID code pilot technology
 - Signal/Noise Ratio:96dB
 - Receiving Response:50Hz~18KHz
 - Distortion:0.05%
 - Audio Dynamic Range:96dB
 - Transmission Delay:2.5ms
 - Power supply:18650 Lithium Battery 3.7V,1PCS
-

AKAI


1. Microphone's Functions:

- ①. Microphone head grill: sound pick-up
- ②. LED display: working station indication;
- ③. Power switch: ON / OFF; (In working condition, press the switch and hold 3 seconds will be OFF)
- ④. Battery :18650 Lithium Battery 3.7V;
- ⑤. Type-c charging port;
- ⑥. Battery cover.

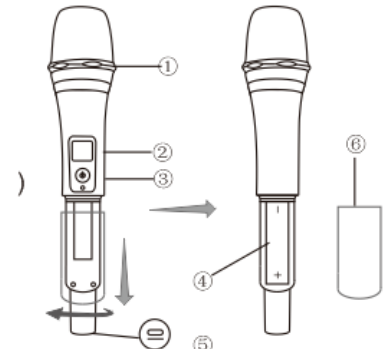

2. Receiver's Functions

- ①. Audio plug 6.35mm;
- ②. Power switch;
- ③. Power indicator;
- ④. Type-c charging port;
- ⑤. RF signal indicator;
- ⑥. Antenna.
- ⑦. Battery cathode
- ⑧. Li-ion battery compartment
- ⑨. Battery anode


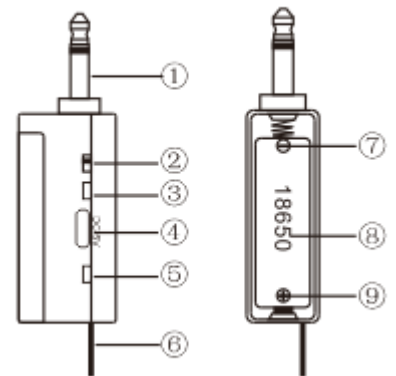


3. Operations:

- 1) Please make sure both receiver and microphone are turned on;
- 2) Please make sure both receiver and microphone have same frequency;
- 3) Please make sure the battery was properly mounted;
- 4) Turn on your devices (both transmitter and receiver).
until the LED or display is flashing.
- 5) Then test the devices if it is working normally.


4. Recharging the Battery:

- ①. When the transmitter's display or receiver's power LED is flashing, you must recharge the battery;

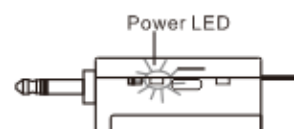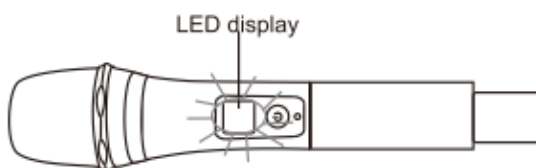

- ②. Use the Type-C to USB cable and your own mobile power adapter recharging the microphone or receiver.
-

AKAI

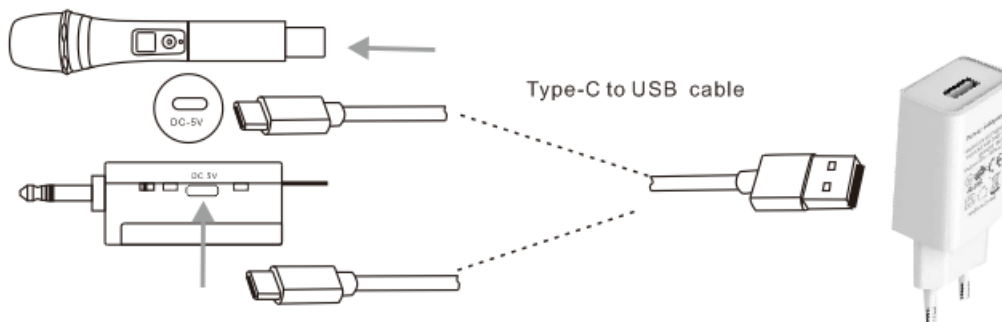

③. While charging, the LED indication will be red. When the battery is fully charged, the LED indicator will be OFF.

5. Disposal of electrical and electronic equipment:



This symbol on the product or packaging means that the product should not be treated as household waste. Do not throw garbage at the end of its life, but take it to a collection center for recycling. In this way you will help to protect the environment and be able to prevent any negative consequences that it would have on the environment and human health.

To find your nearest collection center:

- Contact local authorities
- Access the website: www.mmediu.ro
- Request additional information from the store where you purchased the product.

IMPORTER/PRODUCER: SC INTERVISION TRADING-RO SRL

I.C Bratianu Boulevard 48-52 no, Building A, 5th floor,
504-505 room, Pitesti City, Arges County, Romania
Post code: 110121